



ADA Transfer Showers

ONE-PIECE DOMED ACRYLIC

AQUARIUS
BATHWARE™

S 4136 BF

OD: 43.25" x 36.25" x 83.75"

ID: 36" x 36" Center Point

Weight: 160

Load Factor: 1.06

Handed By: Valve Wall L/R

This unit complies with ANSI Z124.2, ICC/ANSI A117.1, ASTM F463, ASTM E84, UPC, HUD, ADA, ABA, SBCCI, NAHB.

Also available as a MAS compliant unit.

Warranty: Gelcoat models have a 3 year limited warranty. Acrylic models have a 5 year limited warranty. Pumps, parts, and accessories 1 year limited warranty. For further details please refer to the complete warranty section.

Due to the nature of the materials, dimensions may vary +/- 1/2".



Photograph Illustrates Package One - Handed by Valve Wall Left

PKG ONE - ADA/ANSI: S 4136 BF

- .75" No Recess BF Threshold
- Handed by Valve Wall L/R
- Dual Recessed Receiver Flanges
- Mudset
- White Premium Cast Acrylic

Factory Installed Accessories (Valve not included):

- L-Bar - 32.5" x 18" x 1.5" Smooth SS Radius
- S-BAR - 24" x 1.5" Smooth SS
- 32" X 21" Frameless HDPE RAD Fold Up Seat
- 1" OD 18 Gauge SS Grommet Style Curtain Rod

For ADA compliance, installed accessories must include L-Bar, L-Seat, pressure balancing mixing valve, hand-held shower with slide bar, vacuum breaker and 60" hose. An additional vertical S-Bar is required for ANSI compliance. Unit and accessories installed per ADA/ANSI and Praxis Installation and warranty guidelines.

BUILD TO ORDER BASE PLUS ACCESSORIES

BASE UNIT 1: S 4136 BF

- Specify Threshold Height
- Handed by Valve Wall L/R
- Dual Recessed Receiver Flanges
- Mudset
- Reinforced for Standard Accessories

BASE UNIT 2: S 4136 BF EB

- .75" No Recess BF Threshold
- Handed by Valve Wall L/R
- Dual Recessed Receiver Flanges
- EasyBase™
- Reinforced for Standard Accessories

BASE UNIT OPTIONAL ACCESSORIES

Standard Finish - Premium Cast Acrylic:

- White
- Bone
- Biscuit

Grab Bars

- S-Bar - 24" x 1.5" Smooth SS
- S-Bar - 24" x 1.25" Smooth White CC
- S-Bar - 24" x 1.25" Peened SS
- L-Bar - 32.5" x 18" x 1.5" Smooth SS Radius
- L-Bar - 32.5" x 18" x 1.25" Smooth White Radius
- L-Bar - 32.5" x 18" x 1.25" Peened SS Radius

Inside Curtain Line Seats (Revised ADA-ABA 2004)

- 32" X 21" Frameless White HDPE RAD Fold Up Seat
- 32" X 21" Frameless White Padded RAD Fold Up Seat
- 32" X 21" Frameless Woodgrain Phenolic RAD Fold Up Seat
- 32" X 14.5" Padded w/ Legs Seat (Bariatrics)
- Acrylic Molded Seat

Full Depth of Stall Seats (ADAAG 1991-2002)


- 34.5" X 21" Frameless White HDPE RAD Fold Up Seat
- 34.5" X 21" Frameless White Padded RAD Fold Up Seat
- 34.5" X 21" Frameless Woodgrain Phenolic RAD Fold Up Seat

Factory Modifications


- Diamond Texture on Walls
- Modified Drain Location - Specify Location
- Domelight Drilling
- Valve Drilling - Specify Hole Size
- .75" No Recess BF Threshold
- 2" BF Threshold (Not Available with EasyBase™)
- Wood Reinforcement for HUD
- Full Wood Reinforcement
- ArmorShield P3 Protection
- Install 30" Slide Bar / HS Kit
- Install SS Soap Dish - Recessed
- Install Standard Symmons Valve Package
- Nurse Call Box Drilling - Specify Location
- 1" OD 18 Gauge SS Grommet Style Curtain Rod
- 1" OD 18 Gauge White Grommet Style Curtain Rod

Field Installed Accessories (Shipped Loose)

- No Caulk Drain - Chrome
- Semi-permanent Threshold
- Collapsible Dam - White 42"
- Caps for Collapsible Dam - Pair
- Curtain - Premium 42" x 72" White Nylon Weighted
- Curtain - Heavy Duty 42" x 72" White Vinyl Weighted
- Dome Light - Voltage 144 Standard
- Dome Light - Voltage 277





Top View

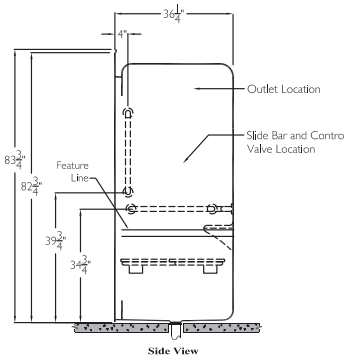


Side View

DETAIL OF DRAIN CORE AREA

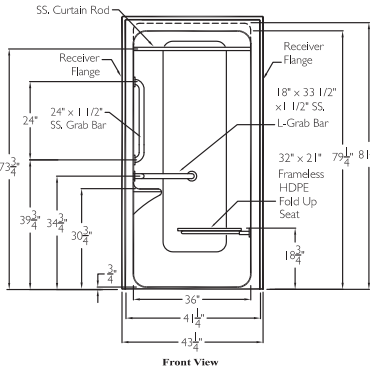

Front View



FRAMING DIMENSIONS

A*	B	C	D
43 1/2"	36 1/4"	18 1/4"	18"

- Refer to pages 67 & 68 to view corresponding framing detail.
- 10" Diameter x .5" deep recess around drain core
- Unit must be installed into a recessed pit or build up finished floor to comply with ADA threshold guidelines.



HDPE (high density polyethylene) seats used by Praxis Companies, LLC contain recycled materials.